



C1210

1200 X 1000 MM

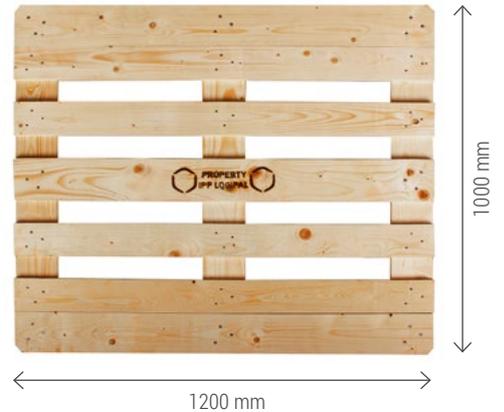

SPECIFICATIONS

CHARACTERISTICS	OWNERSHIP	USAGE
<ul style="list-style-type: none">• 3-skid base pallet.• High quality.• Chamfered corners.	IPP pallets always remain the property of IPP, part of Faber Group.	Can be used in a variety of IPP systems: <ul style="list-style-type: none">• One-Way Trip• Daily rental• Customer specific solutions

MATERIAL	HEIGHT	TOP DECK LENGTH X WIDTH	APERTURE HEIGHT 1000 MM	APERTURE HEIGHT 1200 MM
Controlled range of quality softwood timber.	141 mm	1200 x 1000 mm	99 mm	99 mm

WEIGHT	LOAD CAPACITY	COULEUR	MARKINGS	PAINT
+/- 22 kg	Rating 1250 kg maximum uniformly distributed & properly racked. Not to exceed 5000 kg when stacking loaded pallets.	Painted in IPP brick brown.	Property IPP marking at upper deck and middle block.	Water based paint that complies with the relevant European legislation.

Dimensions subject to allowable manufacturing tolerances.

IPP reserves the right to change any of the above information without prior notice.

www.ipp-pooling.com